

Environmental Instrumentation

Characterize the environment.

1,2 New Instrumentation

Monitoring Networks: MPS-6 Water Potential Sensor,
G3 Drain Gauge, ES-2 Electrical Conductivity Sensor.
Hydrology: VSA, CTD Sensor, WP4C and TrueDry.
Canopy: SRS, PRI/NDVI.

3 Soil Moisture Networks

GS3 Sensor: Rugged Soil Moisture.
EC-5: All Purpose, Low Cost.
5TE: Manage Salts and Fertilizer In Your Soils.
5TM: New Epoxy Body.
10HS: Large Area of Influence.
MPS-6: Water Potential and Soil Temperature Over Time.

4 Data Management

Em50 Series Data Loggers: Data Storage and Delivery.
DataTrac 3: Graph, Store, and Transfer Data.
ProCheck: Handheld Sensor Readout.

5 Environmental Sensors

New: DS-2: Sonic Anemometer
Cup Anemometer: Wind Speed and Direction.
PYR/PAR: Pyranometer and Photosynthetically Active Radiation.
ECRN-100: Precipitation Measurement.
Temp RH: VP-3.
RT-1: Soil Temperature.

6 Canopy

LP-80: Photosynthetically Active Radiation and Leaf Area
Index Ceptometer.
Leaf Porometer: Stomatal Conductance.
Leaf Wetness Sensor: Duration of Leaf Wetness.

7 Hydrology


Infiltrometer: Hydraulic Conductivity and Infiltration.
Drain Gauge G3

7 Thermal Properties

KD2 Pro: Thermal Properties Measurement.
RK-1 Sensor Kit: Thermal Conductivity in Hard Materials.

Water Potential Conversions

—On the go.

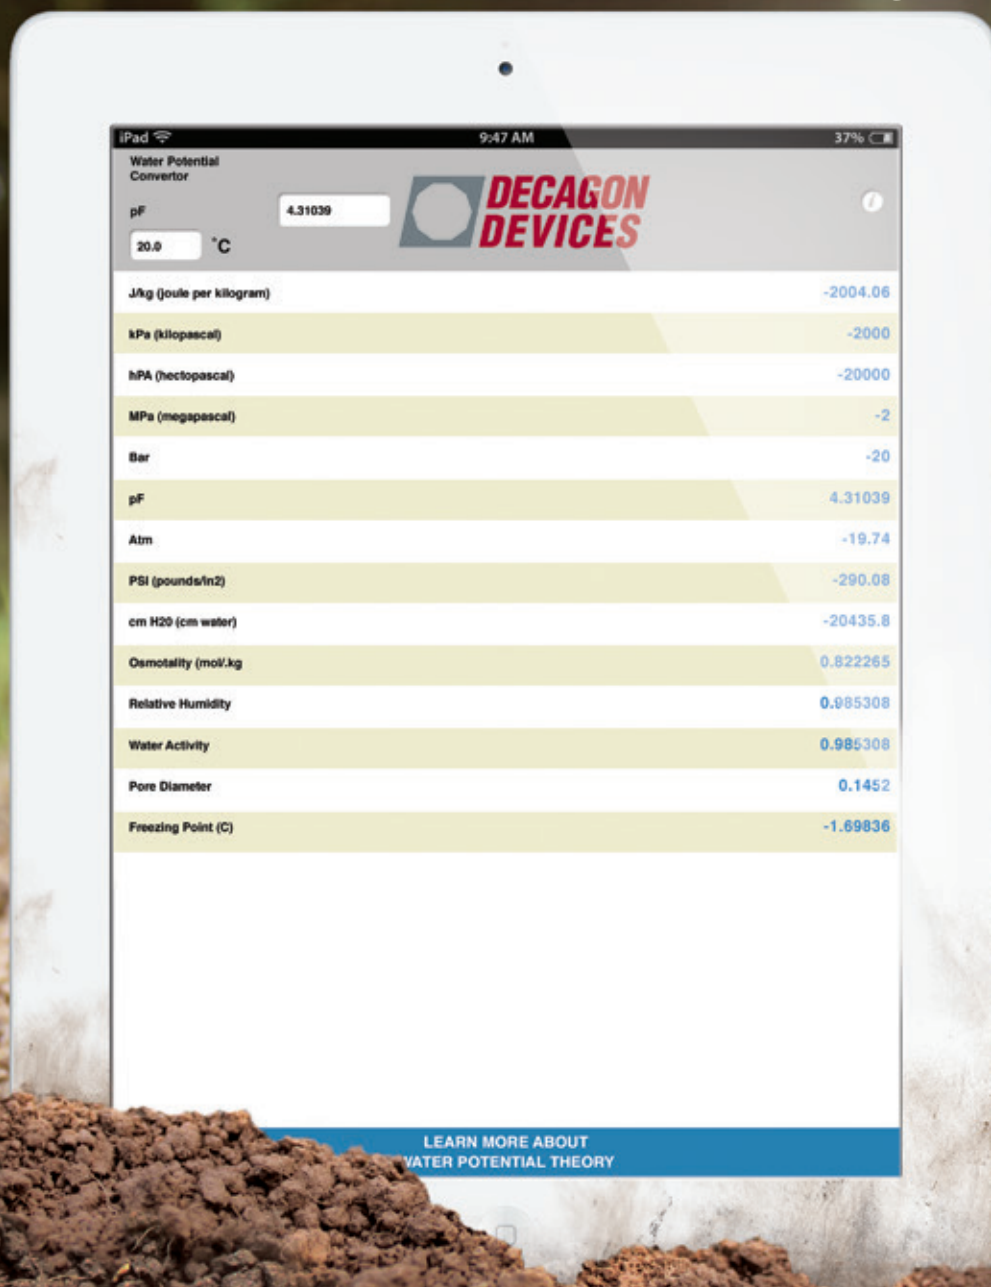

FREE Decagon Mobile Application now available from the App Store and Google Play. Search for Decagon on either online location.





2013 marks Decagon's 30th anniversary and it has made me think about the progress in monitoring the environment over the last 30 years. I think there are three instrument-related developments that have advanced environmental science:

- *Small, low-power data loggers with wireless communication capabilities.*
- *Significant increases in computer processing power and speed.*
- *Dielectric soil moisture sensors (TDR, FDR).*

These developments make it possible to scatter collection nodes across the landscape. Researchers can now gather and analyze staggering amounts of data. Projects like B2 Landscape Evolution Observatory at Biosphere 2 and the Site-Specific Climate Friendly Farming project at Cook Farm are beginning to show us what's possible with these big networks.

What's next? It's impossible to say, of course, but I'm excited to see what new measurements will move the science forward. EC measurements, for example, are still somewhat crude but show promise in refining the way we look at water and nutrient movement in soils.

A handwritten signature in dark green ink, appearing to read 'Bryan Wacker'.

Bryan Wacker
Vice-President Marketing




learn.decagon.com

Maximize your instrument potential
with a wide range of online tutorials.



New Instrumentation

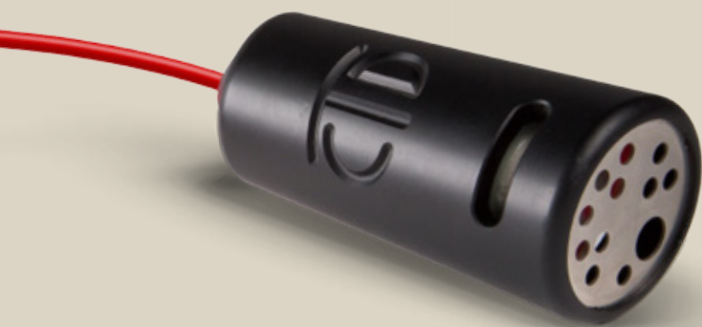

CTD-5/CTD-10 Sensor

Water depth, temperature, and electrical conductivity.

Continuously monitor groundwater and surface water level changes along with electrical conductivity and temperature.

CTD-5/-10 Specifications

Water Depth

Range: 0 to 5 m/10 m.

Accuracy: $\pm 0.05\%$ of full scale at 20°C.

Resolution: 1 mm/2 mm.

Electrical Conductivity

Range: 0 to 120 dS/m (mS/cm).

Accuracy: ± 0.01 dS/m or $\pm 10\%$.

Resolution: 0.001 dS/m.

Temperature

Range: 0 to +50°C.*

Accuracy: $\pm 1^\circ\text{C}$.

Resolution: 0.1°C.

Data Logger Compatibility

Em50/Em50R/Em50G.

Call for compatibility of Data Loggers.

*Operating temperature 0 to 50 °C (Pressure transducer cannot be allowed to freeze while submerged).



MPS-6 Sensor

Soil Matric Potential.

Breakthrough calibration techniques give the MPS-6 the accuracy of an individually calibrated sensor at a price comparable to most uncalibrated sensors.

MPS-6 Specifications

Soil Water Potential

Range: -9 to -100,000 kPa.
(pF 1.96 to pF 6.01)

Accuracy: $\pm 10\%$ of reading +2 kPa.
(from -9 to -100 kPa)

Temperature

Range: -40 to 60°C.

Accuracy: $\pm 1^\circ\text{C}$.

* Please see manual for detailed explanation of accuracy



SRS (PRI/NDVI)

Monitor the Normalized Difference Vegetation Index or the Photochemical Reflectance Index.

The SRS is designed for long-term autonomous measurement of vegetation indices under field conditions. One of its primary design goals is to reduce the cost of collecting high quality spatially distributed data in quantity over an entire growing season.

SRS Specifications

Calibration: NIST traceable calibration known spectral radiance ($\text{W m}^{-2} \text{nm}^{-1}$) or irradiance ($\text{W m}^{-2} \text{nm}^{-1} \text{sr}^{-1}$).

Foreoptics: (1) Cosine correcting Teflon diffuser, hemispherical field of view (2) Field stop, 20° field of view.

PRI Wavebands: 531 \pm 3 and 570 \pm 3 nm peak wavelengths, with 10 nm full width half maximum (FWHM) band widths

NDVI Wavebands: 630 \pm 5 and 800 \pm 5 nm peak wavelengths, with 50 nm and 40 nm full width half maximum (FWHM) band widths.

Cable Length: 5 m standard, custom cable length available upon request.

Operating Temperature Range:

-40 to 50°C.

Accuracy: 10% or better for spectral irradiance and radiance values.

Measurement Time: < 300 ms.

Dimensions: 43 x 40 x 27mm.

Power: 3.6 to 15 VDC, 4 mA (reading, 300 ms), 30 μ A (quiescent).

Connector Type: 3.5 mm (stereo) plug or stripped and tinned lead wires.

Communication: SDI-12 digital sensor.

Drain Gauge G3

Water movement below the root zone.

Use the Drain Gauge G3 to collect, monitor, and analyze water moving below the root zone. The Drain Gauge G3 collects water moving through the vadose zone and sends drainage rate measurements to a surface data logger. The Drain Gauge G3 is built to be buried and stay buried.

Drain Gauge G3 Specifications

Measurement surface area: 507 cm².

Sampling reservoir volume: 3 L.

Accuracy: ± 1.4 mm drainage.

Resolution: 0.2 mm drainage.

Suction at intake: 110cm (11 kPa).

Total length: 147 cm.

Divergence control tube (DCT) length: 60 cm.

Measurement time: 150 ms.



TrueDry CV9

Multi-sample moisture content analyzer

The new TrueDry CV9 measures moisture content of nine samples with just four minutes of hands-on work time.



TrueDry lets you select drying temperature and dry to a specific time or to constant weight.

- Dry instead of burning.
- Control contact drying for better precision.
- Dry to a standard.

TrueDry Specifications

Measurement Values

Moisture Range: 0.01% to 99%

Sample Size Range: 1 to 35 g

Moisture Content Measuring Method:

Loss on Drying using any Standard Method

Drying Unit

Temperature Range: 50 to 150 °C

Temperature Control: +1 °C

Temperature Control: +1 °C

Unit Specifications

Number of Samples: 9

Sample Cup Diameter: 5.7 cm (2-1/4 ")

Chamber Humidity: 1% (0.01 Aw)

Data Storage: 4 GB SD Card

Display: Touchrev 7" LCD touch screen

Vapor Sorption Analyzer

Automated soil water characterize curves.

Generates up to 200 data points (water potential vs. water content) for both adsorption and desorption within 24 to 48 hours. The VSA works in the dry (-10 to -475 MPa) range. Create automated soil-water characteristic curves and generate all the correlations with clay activity, surface area, and swelling potential.



Hold humidity constant and look at the way soil takes up water into its crystal structure (2:1 clays) and monitor water content change over time.

VSA Specifications

Range: -10 to -475 MPa.

Accuracy: ±1 MPa or ±1%.

Temperature operating range: 15 to 60°C.

Size: W 25.4 x L 38.1 x H 30.5 cm (10x15x12 in.)

Weight: 19 kg.

ES-2

Temperature and electrical conductivity.

The ES-2 allows you to obtain additional EC measurements for salt balance studies and nutrient monitoring. Monitor EC in pipes, tanks or wells.



ES-2 Specifications

Electrical Conductivity

Range: 0 to 120 dS/m (mS/cm).

Accuracy: ±0.01 dS/m or ±10% (whichever is greater).

Resolution: 0.001 dS/m.

Temperature

Range: -40 to +50°C.

Accuracy: ±1°C.

Resolution: 0.1°C.

Data Logger Compatibility

Call for compatibility of Non-Decagon data loggers.

WP4C

Lab water potential measurements.

The WP4C measures water potential by determining relative humidity of the air above a sample in a closed chamber (an AOAC-approved method, conforms to ASTM 6836).



New features

- **Precise Mode**—verifies full equilibrium before displaying a final reading.
- **Speedy Equilibration**—new hydrophobic teflon impregnated nickel alloy sample chamber coating reduces equilibration time.
- **Finely-Tuned Adjustments**—new algorithms allow precision calibration and ±0.05 MPa (or better) accuracy.
- **Better range and accuracy**—resolves temperatures to a thousandth of a degree to push the functional range to -0.1 MPa.

WP4C Specifications

Operating environment: 5 to 43°C (41 to 110°F).

Temperature control: 15 to 40°C ±0.2°C.

Sensors: 1. Infrared temperature
2. Chilled-mirror dew point.

Range: 0 to -300 MPa.

Accuracy: ±0.05 MPa from 0 to -5 MPa, ±1% from -5 to -300 MPa.

Read time: Typically 5 to 10 minutes.

Interface cable: Serial cable (included).

Data communications: RS232

compatible, 8-bit ASCII code, 9600 baud, no parity, 1 stop bit.

Weight: 3.2 kg (5.2 kg shipping weight).

Universal power: 110-220V AC, 50/60 Hz.

Sample dish* capacity: 7 ml recommended (15ml full).

Calibration standard: 0.5 molal KCl (-2.22 MPa).

*25 plastic cups and 10 stainless steel cups included.



Watch a video on innovative ways the VSA is being used in soils applications.

learn.decagon.com/VSA



Watch R&D scientist Dr. Doug Cobos discuss the advancements made with the new WP4C.

learn.decagon.com/WP4C

Soil Moisture Networks



Measurement & Benefits	Range	Accuracy
GS3 Volumetric Water Content, Electrical Conductivity, Dielectric Permittivity, Temperature. Benefits: Rugged stainless steel design for longest life.	VWC: 0–100%. EC: 0 to 23 dS/m (bulk). Temperature: -40 to 60°C.*	VWC: ± 3%, typical mineral soils up to 10 dS/m Electrical Conductivity (EC): ±5% from 0 to 5 dS/m, ±10% from 5 to 23 dS/m. Temperature: ±1°C.
EC-5 Volumetric Water Content. Benefits: All purpose, least expensive soil moisture sensor.	VWC: 0–100%.	VWC: ±3%, typical mineral soils up to 8 dS/m. VWC Potting soil: ±3% VWC, 3 to 14 dS/m.
5TE Volumetric Water Content, Electrical Conductivity, Dielectric Permittivity, Temperature. Benefits: Manage salts and fertilizers in your soils.	VWC: 0–100%. EC: 0 to 23 dS/m (bulk). Temperature: -40 to 60°C.*	VWC: ±3%, typical mineral soils up to 8 dS/m. Bulk EC: ±10% from 0 to 7 ds/m, user calibration required above 7 ds/m. Temperature: ±1°C.
5TM Volumetric Water Content, Dielectric Permittivity, Temperature. Benefits: Include temperature dependencies in your research study. Rugged epoxy body.	VWC: 0–100%. Temperature: -40 to 60°C.*	VWC: ±3%, typical mineral soils up to 8 dS/m. Temperature: ±1°C.
10HS Volumetric Water Content, Dielectric Permittivity. Benefits: Largest volume of influence decreases effects of heterogeneity.	VWC: 0–57%.	VWC: ±3%, typical mineral soils up to 8 dS/m.

* Sensors can be used at higher temperatures under some conditions. Contact Decagon with your specific application.



Data Management



Em50 Data Loggers

Data loggers use either direct connection, radio, or cellular (GSM Cell Modem) technology to deliver stored data. With the cellular-enabled Em50G you can access and download the data anywhere with internet connection.

Storage: Up to 36,000 scans.

Logging Interval: 5 min. to 24 hrs.

Input ports: 5 channels, any Decagon sensor.



Cellular Transmission

Direct Connection

Radio 900 MHz



ProCheck

Handheld readout for all Decagon sensors.

The ProCheck is an indispensable tool for making portable measurements, or for checking the quality of sensor installations. You can also program SDI-12 addresses of supported sensors, making large-scale installations of SDI-12 systems much quicker. The ProCheck is a must have for any large installation.



DataTrac 3

Understand your data.

DataTrac 3 graphical and database software organizes, graphs, and stores your data. View and edit data in table format, create reports, and transfer information to other DataTrac 3 users.

- Educate and inform your team efficiently.
- Adjust date ranges, add/subtract data from specific sensors, change target bands of your finding.
- Watch data in real-time.
- Add notes to the data stream.
- Automatically collect data from your Em50G/Em50R loggers chronologically.
- Combine data streams and track meaningful indicators.

Download free 30-day trial DataTrac 3 software:

learn.decagon.com/datatrac3



Environmental Sensors



RT-1


The rugged RT-1 soil temperature sensor is an easy-to-use sensor for measuring the temperature of soil or other materials. The sensor is stainless steel, completely water proof, submersible, and designed for continuous outdoor use.

Resolution: 0.1°C.

Range: -40 to 80°C.

Temperature accuracy: ±1°C.

Type: Thermistor.

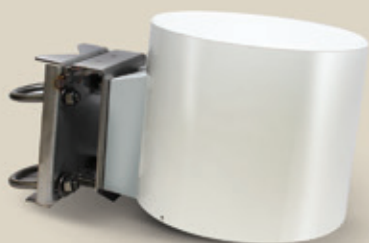

ECRN-100

High-resolution rain gauge with two internal tipping spoons.

Resolution: 0.2 mm.

Funnel size 17x14.2 cm.



Cup Anemometer

The anemometer measures both wind speed (using windcups and a magnetic switch) and wind direction (with wind vane). Includes sealed stainless steel bearings for long life. The range and accuracy specifications of this unit have been verified in wind-tunnel tests (information available upon request).

Resolution: 1 mph (0.45 ms⁻¹).

Range: 0 to 129 mph.

Accuracy: ±5%.

Direction Resolution: 1°C (0-355°).



Pyranometer or Photosynthetically Active Radiation

Completely water proof, submersible and designed for continuous outdoor use.

Cable length: 3 m.

Range PAR: 0 to 2000 $\mu\text{mol}/\text{m}^2\text{s}^{-1}$.

Range PYR: 0 to 1750 W m⁻².

Dimensions: 24 mm diameter, 29 mm deep.

Accuracy: ±5%.



VP-3

Durable sensor measures relative humidity, vapor pressure, and temperature and outputs all three values as a digital signal.

Probe RH range: 0 to 100% RH.

Temperature range: -40 to 80°C.

Temperature accuracy: ±1°C.

RH accuracy: ±2% from 10-90% RH,

±3% from 0-10% RH, and 90-100% RH.

See website for complete accuracy of specs.

New

DS-2 Sonic Anemometer

The DS-2 is a two dimensional sonic anemometer that measures wind speed and wind direction. Wind speed and direction are fundamental measurements necessary for a wide range of agricultural, forestry, and micrometeorological research and management applications. The DS-2 has no moving parts, does not require maintenance or recalibration and is capable of making high accuracy measurements, even at low wind speeds.



SC-1 Leaf Porometer

Get high quality data without fans, tubes, or pumps.

Steady state design makes accurate stomatal conductance measurements affordable and practical for everyday research. Use stomatal conductance to evaluate plant water use, quantify water stress, and compare physiological response of different species.

Benefits

- Automatic sampling mode eliminates user subjectivity.
- No tubes, pumps, or fans.

Leaf Porometer Specifications

Conductance range: 0-1000 mmol/m² s⁻¹.

Accuracy: ±10%.

Operating environment: 5 to 40°C, 10 to 100% RH with desiccant chamber.

Measurement Units: mmol/m²s⁻¹, m²s / mol⁻¹, s/m.

Sensor head cable length: 1.2 m (4 ft.).

Measurement time in auto mode: 30 s.

Power: 4 AA alkaline cells, 3 years (AA drain in sleep mode < 50 µA).

Data Storage: 4095 measurements in flash memory.

DS-2 Specifications

Wind speed range: 0 to 30 m/s.

Wind speed resolution: 0.01 m/s.

Wind speed accuracy: 0.30 m/s or < 3%, which ever is greater.

Wind direction range: 0 to 359°.

Wind direction resolution: 1°.

Wind direction accuracy: ± 3°.

Maximum sampling speed: 1 Hz.

Operating temperature range: 40 to +50°C.

Physical dimensions diameter: 100 mm, Overall height: 155 mm.

Cable length: 5 m standard, custom length available upon request.

Outputs: (3) Wind speed, gust speed, wind direction or vector.

Leaf Wetness Sensor

Measure duration of leaf wetness. Requires no painting or calibrations and detects trace amounts of water or ice on the sensor surface.

Leaf Wetness Sensor Specifications

Measurement time: 2 ms.

Power: 2.5 VDC @ 2 mA to 5 VDC @ 7 mA.

Output: 320 - 1000 mV @ 3 V excitation.

Operating environment: -20 to 60°C.

Probe dimensions: 11.2 x 5.8 x 0.075 cm (4.4 x 2.3 x 0.029 in).

Cable length: 5 m standard, or custom length.

Connector type: 3.5 mm plug.

AccuPAR LP-80 Ceptometer

Measure both PAR and LAI.

Measure transmitted PAR and calculate LAI at any location within a plant or forest canopy. Used to estimate biomass production, determine radiation interception.

Benefits

- Non destructive.
- Lightweight and rugged field-ready design.
- External PAR sensor included.

AccuPar LP-80 Specifications

Number of sensors: 80.

Overall length: 102 cm (40.25 in).

PAR range: 0 to >2,500 µmol m⁻²s⁻¹.

Resolution: 1 µmol m⁻²s⁻¹.

Minimum spatial resolution: 1 cm.

Data storage capacity: 1MB RAM, 9000 readings.

Unattended logging interval: User selectable, between 1 and 60 minutes.

Data retrieval: Direct via RS-232 cable.

Power: 4 AAA batteries.

Extension cable option: 7.6 m (25 ft).

Operating environment: 0° to 50°C (32°-122°F), 0 to 100% relative humidity.



86.5 cm



Watch a three minute video to see how the SC-1 uses first-principle methods to measure stomatal conductance.

learn.decagon.com/porometer



Watch a two minute video on measuring PAR and LAI with the AccuPar LP-80.

learn.decagon.com/LP80

Hydrology

Remote Ground Water Monitoring CTD Sensor and Em50G data logger

The CTD sensor combined with the Em50G data logger are the perfect pair for remote groundwater monitoring. The Em50G can send your water depth, temperature, and electrical conductivity data to your computer up to six times daily by cellular transmission worldwide.



Infiltrrometer

Portable Measurement of Hydraulic Conductivity and Infiltration.

Adjustable suction and porous stainless steel contact plate ensures good contact and minimizes surface disturbance for a quick and accurate measurement.

Infiltrrometer Specifications

Total length: 32.7 cm.

Suction range: 0.5 to 7 cm of suction.

Water volume for operation: 135 mL.

Diameter of sintered stainless steel disc:
4.5 cm diameter, 3 mm width.



Thermal

KD2 Pro

Thermal conductivity, resistivity, diffusivity and specific heat capacity.

Measure heat transfer in the soil-plant-atmosphere continuum with the KD2 Pro Thermal Properties Analyzer. The KD2 Pro has three interchangeable sensors which measure thermal conductivity, diffusivity and specific heat (heat capacity). Data storage capabilities, an automatic data collection mode, and utility software to download data to your computer.

KD2 Pro Specifications:

Measurement time: 1 to 10 min.

Data storage: 4095 readings.

Case size: 15.5 x 9.5 x 3.5 cm.

Power: 4 AA Batteries.

Cable: .8 m.

Accuracy*: ± 5 to $\pm 10\%$ Conductivity/Resistivity, $\pm 10\%$ Thermal Diffusivity, $\pm 10\%$ Specific Heat.

Environment: -50 to 150°C .

Ranges*: K: 0.02 to $4 \text{ W m}^{-1} \text{ C}^{-1}$, D: 0.1 to $1.0 \text{ mm}^2 \text{ s}^{-1}$, R: 0.5 to $50 \text{ mC W}^{-1} \text{ C}^{-1}$, C: 0.5 to $4 \text{ MJ m}^{-3} \text{ C}^{-1}$.

*Accuracy and measurement range vary with sensor type.

TR-1

10 cm needle length

Thermal conductivity/resistivity of soil or porous materials. ASTM and IEEE compliant.



SH-1

3 cm dual needle length

3 parameters: thermal conductivity, thermal diffusivity, and specific heat.



KS-1

6 cm needle length

Thermal conductivity of liquids.




Optional Sensor



RK-1 (sold separately)


6 cm needle length

Thermal conductivity/resistivity; for use with stone or cement samples. The optional RK-1 sensor kit measures rock, concrete and other materials where drilling a pilot hole is required.



Water Potential

Instrument Ranges

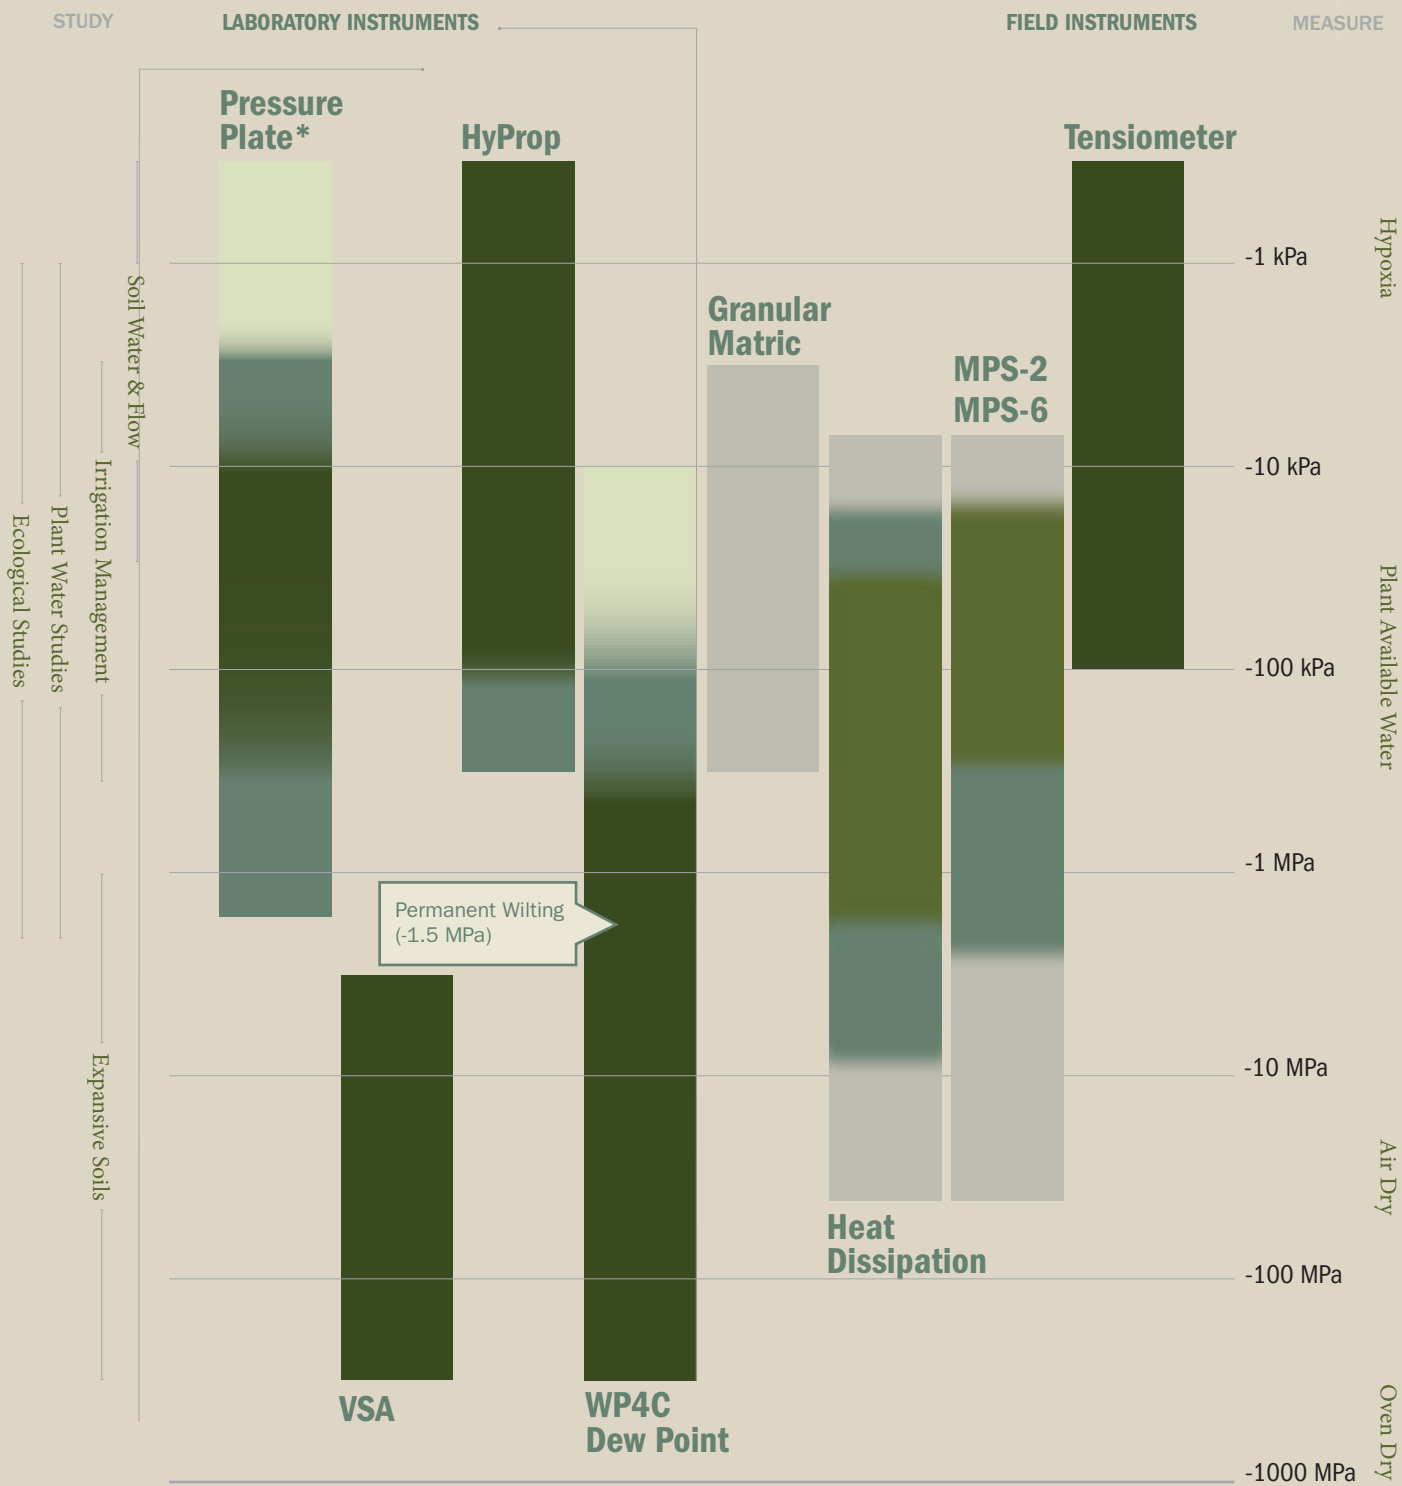

- Excellent accuracy
- Good accuracy
- Moderate accuracy
- Responds to change, may not be accurate
- Useful in some applications
- Not recommended or out of range

*Assumes equilibrium time 1-3 months.




1-509-332-5600
support@decagon.com
Monday- Friday 7am to 5pm (Pacific)



learn.decagon.com

Maximize instrument potential with a wide range of online tutorials.

Distributed by:

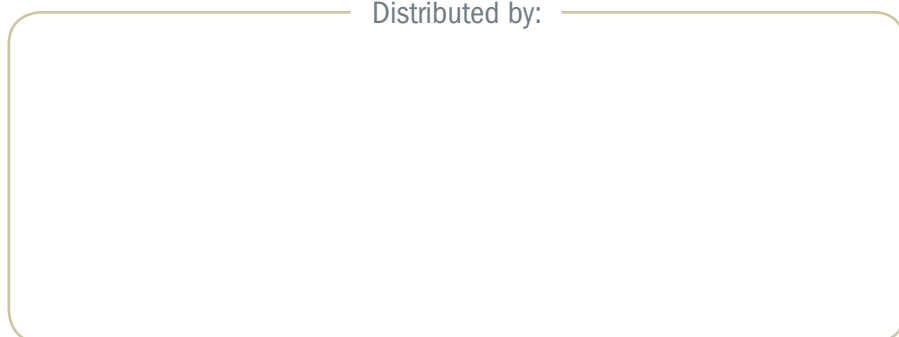

2365 NE Hopkins Ct.
Pullman, WA 99163
Fax: 509-332-5158
instruments@decagon.com
Phone: 1-509-332-2756